

4-zone expander control for RF security

W-4SEC

Description

4-zone expander control for connecting security detectors. Equipped with RF for receiving commands from the remote control (RC-4BRF).

Use in conjunction with the T-SEC keypad can be configured for home or garage and also allows the configuration of the control panel parameters and local zones.

Functionalities

- 4 digital security zones (NC);
- Configurable zones for intrusion, smoke / fire, gas leak, flood and panic;
- RF transmitter receiver (868.3 MHz or 915 MHz).

Application

Housing, Hotels, Offices, Factories.

Accessories

Touch panel: - T-SECx-x

Certifications

- EN 60669-2-1
- Low voltage directive 2014/35 / EU
- EMC directive 2014/30 / EU

Protections

The power supply to this unit comes from the security central, so its protection is made by a resettable fuse in the central.

Notes

None.



Assembly

Mounting in European equipment box:

- 73 mm diameter
- 60 mm deep

Connections

- + 12V x 1 for wire up to 1.5 mm Ø
- (+ 12V) x 1 for wire up to 1.5 mm Ø
- 0V x 1 for wire up to 1.5 mm Ø
- Safety bus x 1 for wire up to 1.5 mm Ø
- COM x 1 for wire up to 1.5 mm Ø - Z1 x 1 for wire up to 1.5 mm Ø
- Z2 x 1 for wire up to 1.5 mm Ø
- Z3 x 1 for wire up to 1.5 mm Ø
- Z4 x 1 for wire up to 1.5 mm Ø


Electrical characteristics

Power Supply: 12 VDC

4-zone expander control for RF security

W-4SEC

Dimensions

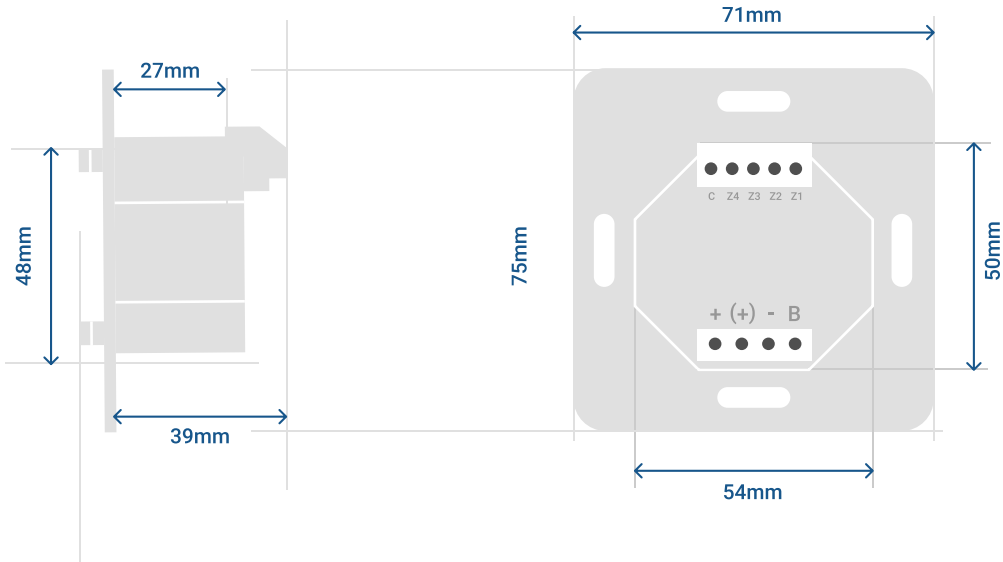

Wiring diagram

