



ATOUGH




**"Simplicity is the
ultimate sophistication"**

Leonardo da Vinci



TOUCH PANELS

TOUCH PANELS

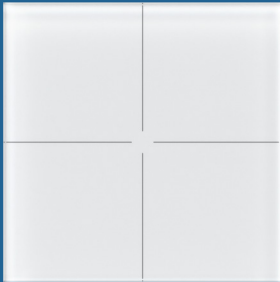

AUTOMATION



SOUND



SECURITY

CLIMA CONTROL

AUTOMATION

9 function touch panel with central led for function indication and backlighting. Touch with audible and luminous feedback.

FUNCTIONALITIES



4 independent programmable keys



Selectable command for each key



Multi-touch key for scenario



4 slide keys for up/down or on/off



Disable/enable backlighting



CLIMA CONTROL · SOUND

9 function touch panel and OLED display for Climate/Sound unit.

FUNCTIONALITIES

Quartz clock for standalone operation:




1 hour backup for power failures



Display brightness decreases after
1 min of non-use



Clima Control/Sound programming function

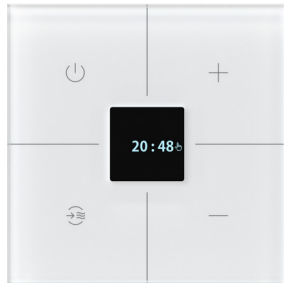

SECURITY

Touch Panel for Security System.

FUNCTIONALITIES

Quartz clock for standalone operation:



Battery backup for about 1 hour without power



Display brightness decreases after 1 min of non-use



Up/Down command for blinds






APPLICATION ATOUCH 5.0

APPLICATION ATOUCH 5.0

APPLICATION ATOUCH 5.0

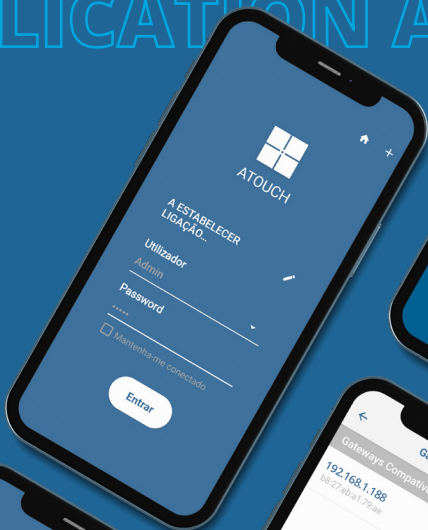


HOW TO INSTALL THE APPLICATION

Install the Atouch 5.0 application on your cell phone via google play or app store

HOW TO ADD YOUR SMARTPHONE FOR THE FIRST TIME

- 1 Open the Atouch 5.0 application, enter the name of the device owner, and click the ☑ that appears in the upper right corner.



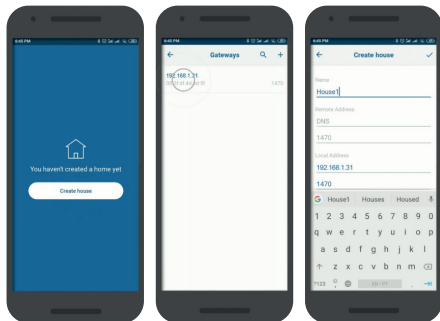


- 2 Tap **Create Home** and select the gateway.

Then give your house a name and click on that ☑ appears in the upper right corner.

The **Create Home** process begins.


RECOGNIZE YOUR HOUSE

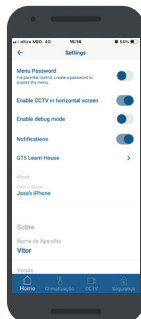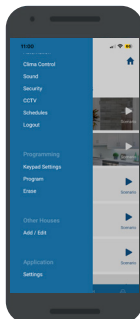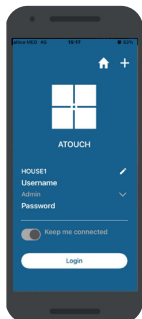

- 3 Log in with the Admin user, enter the pass and tap the **Login** button. Then, open the menu in the upper left corner and go to Application · Settings.
Under Settings, tap **Learn Home** and wait for the process to finish.


- 4 You now have access to the entire system and can configure all the devices installed. From there you can control your whole house with one click.
* point 3 should only be done by a system installer.


HOW TO CREATE DIVISIONS

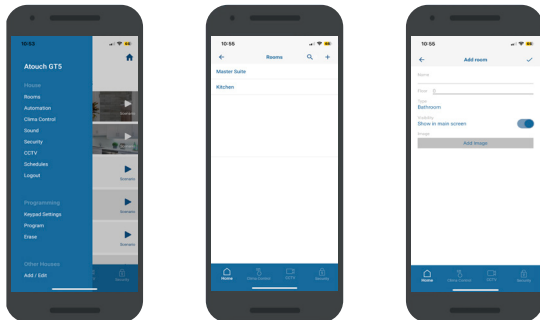






- 1 Open the **Atouch 5.0** application and go to the menu in the upper left corner. Click on **Divisions**.
- 2 To add a new room, click **+** in the upper right corner.
- 3 Assign the room the name, floor, type and image as an option. Then just click **✓** in the upper right corner.


DEVICE NAME ASSIGNMENT

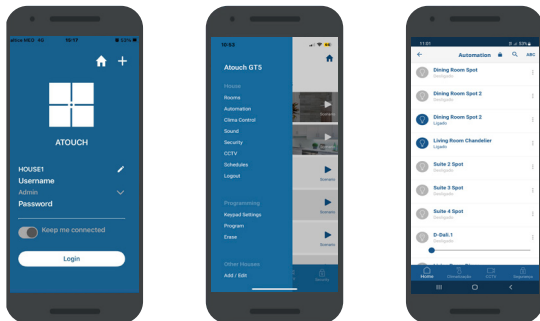





- 1 Open the **Atouch 5.0** application and go to the menu in the upper left corner. Click on the desired system: **Automation, Clima Control, Sound or Security.**
- 2 Within the desired system, click on the icons on the left-hand side in order to visually identify the devices.
- 3 After identifying the devices, click  on the right hand side, assign a name, division, and icon.

HOW TO CONFIGURE TOUCH PANELS

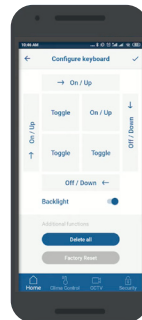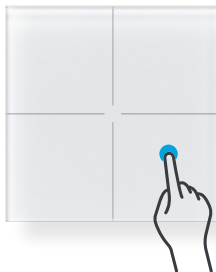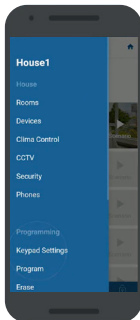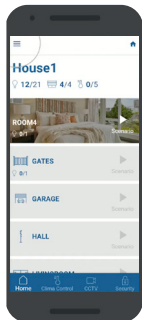



- 1 Open the **Atouch 5.0** application and go to the menu in the upper left corner. Click on **Configure panel**. Click on the panel you want to customize.
- 2 On the screen you can see the panel areas and other additional functions, such as turning on the backlight, deleting made settings, and resetting to default settings.
- 3 Then just click  on the top right corner.

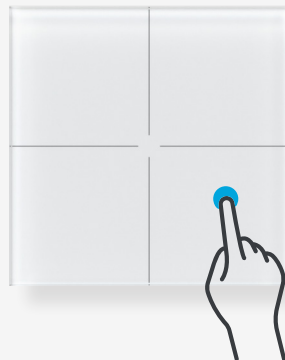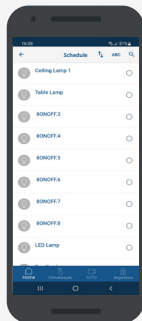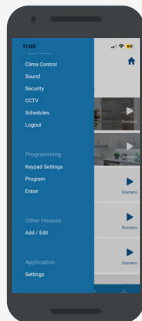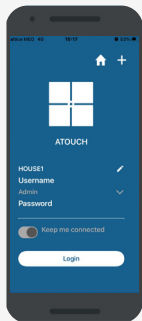HOW TO PROGRAM THE TOUCH PANELS



- 1 Open the **Atouch 5.0** application and go to the menu in the upper left corner. Click on **Program**.
- 2 Choose the device(s) you want to add to a button. To select click on the right side.
- 3 Scroll to the panel and press the desired button or slide.

HOW TO REMOVE DEVICES FROM TOUCH PANELS


- 1 Open the **Atouch 5.0** application and go to the menu in the upper left corner. Click on **Delete**.
- 2 Choose the device(s) you want to remove from a button. To select click on the right side.
- 3 Scroll to the panel and press the desired button or slide.
- 4 If you want to remove the device(s) from all buttons, return to point 2, click  select and click  .


APP 5.0 INSTALLER MANUAL



INSTALL THE APPLICATION

Install the **Atouch 5.0** application on your cell phone via google play or app store.


ADD TO A SMARTPHONE

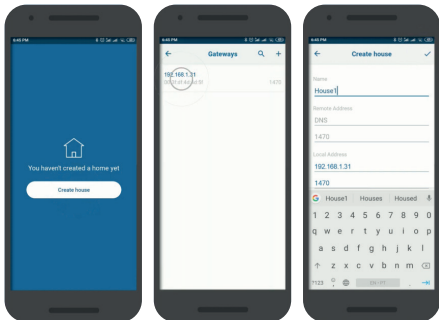- 1 Open the Atouch 5.0 application, put in the name of the device owner, and click  on the one in the upper right corner.



- 2 Tap **Create Home** and select the gateway. By default the gateway is set to IP address 192.168.1.188. To change the address to another IP range, you must click on the  one on the left.
- 3 Then give your house a name and click on the  one in the upper right corner.

RECOGNIZE THE HOUSE VIA THE WEB

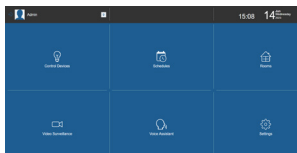


- 1 In any browser enter the local IP of the gateway (192.168.1.188) to open the **Atouch 5.0** application. Log in with the user **Admin**, type the password **12345** and click Login.
- 2 Under **Settings** select **Gateway**, tap **Learn Installation** and wait for the process to finish.
- 3 Now you have access to the entire system and can configure all installed devices.

CREATE DIVISIONS

- 1 From the main menu select **Rooms** to create all the rooms in the house.
- 2 In the top left corner click on **+ Add New**, give it a name and select the user.

ASSIGN NAMES TO DEVICES

- 1 From the main menu select **Devices** to access the list of devices installed in the house.
- 2 In the **Device List** select the type of devices (Lights, Blinds, etc).
- 3 Within **Devices** press the icons on the right hand side to visually identify the devices.
- 4 After identifying the devices click on the  right side, assign a name, division and icon.


ADD VIDEO SURVEILLANCE CAMERA

- 1 From the main menu, select **Video Surveillance** to add cameras.
- 2 In the top left corner click on **+ Add New**, fill in all the necessary data and in the end click on **Save** ✓.

SCHEDULING OF TIME EVENTS


- 1 From the main menu, select **Schedule**.
- 2 In the upper left corner click on **+ Add New**, enter a name and click **Create** ✓.
- 3 Under **Scheduling** click ⊕, choose the days of the week, fill in the action start time and click **Save** ✓.
- 4 In **Actions** click ⊕, choose the device, select the desired status and click **Save** ✓.
- 5 If you want the action to occur with a condition, under **Conditions** click ⊕ and set the condition.

CONFIGURE REMOTE ACCESS

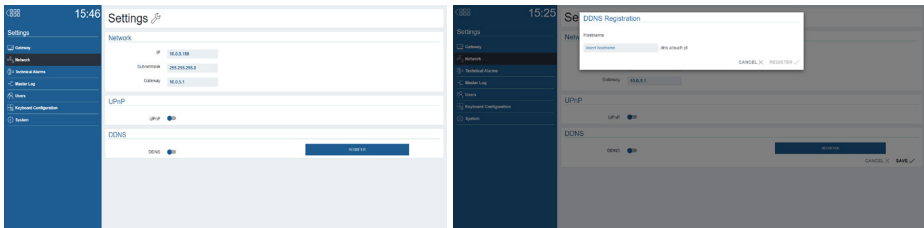

- 1 Under **Settings** select **Network**, check that the default gateway address is the same as the one on your router. If it is not the same, please change it.
- 2 To open the ports remotely on the router enable **UPnP**.
- 3 To access remotely with dynamic **DNS**, under DDNS click **Register**, enter a hostname of your choice, and click **Register**.

CONFIGURE TECHNICAL ALARMS

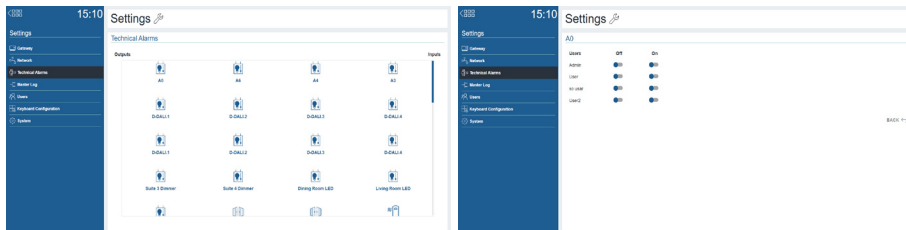

1 Under **Settings** select **Technical Alarms** and select either **Outputs** or **Inputs**.

2 If you selected **Outputs**, choose the desired output and select whether you want to receive notifications when the output is off, on, or both and for which users. In the lower right corner press **Back**.

3 If you selected **Inputs**, choose the desired input and select whether you want to receive notifications when the input is pressed or not pressed and for which users. In the lower right corner press **Back**.

RECORD OF ALL EVENTS

The screenshot shows a mobile application interface. On the left is a dark blue sidebar with a 'Settings' menu. The 'Master Log' option is highlighted. The main screen is titled 'Settings' and shows a 'Master Log' section with radio buttons for '1 hour', '1 day', '1 week', and '1 month'. Below this is an 'Event Log' section with a 'Show Filters' link and a 'Clear Log' button. The event log contains a vertical timeline of events, each with a lightbulb icon, a timestamp, and a description.

Timestamp	Event Description
14/06/2023 14:27:00	The output 'Tulle 1 Spot' was changed to ON
14/06/2023 14:26:59	The output 'Living Room Chandelier' was changed to ON
14/06/2023 14:26:59	The output 'Kitchen Spot' was changed to ON
14/06/2023 14:26:58	The output 'Dining Room Spot 2' was changed to ON
14/06/2023 14:26:57	The output 'Dining Room Spot' was changed to ON
14/06/2023	The output 'Dining Room Spot 2' was changed to ON

- 1 Under **Settings** select **Event Log**.
- 2 Select how long you want all events logged: **1 hour, 1 day, 1 week or 1 month**.
- 3 To simplify the visualization of the events, use the available filters.


USER MANAGEMENT

The screenshot shows a web interface for user management. On the left is a dark blue sidebar with a menu containing: Settings, Gateway, Network, Technical Alarms, Master Log, Users (highlighted), Keyboard Configuration, and System. The main content area is titled 'Settings' and has a sub-header 'Users'. It displays a list of users with the following details:

Name	Role	Last login	Action
Admin	Administrator	Wednesday, 14 June 2023 14:08	EDIT
User	User	Tuesday, 30 May 2023 13:00	EDIT
so USER	Roamingio	Never	EDIT
User2	User2	Never	EDIT

Below the users list is a 'Roles' section with the following items:

Role Name	Action
Administrator	VIEW
User	VIEW
Roamingio	VIEW
User2	VIEW

- 1 Under **Settings** select Users.
- 2 In the upper right corner click  and add the users you want.
- 3 Under **Add New User**, assign a name, role and password. Finally, click **Save** in the lower right corner.

www.atouch.com.pt



/atouch.com.pt



@atouch.winwel



Atouch Winwel



Atouch Winwel

ATOUCH WINWEL

Centro empresarial de Braga
Largo da Misericórdia, Lote E1
4705-319 Braga



Gateway5 enables Automation, Clima Control, Sound and Security to work with HomeKit technology. See <https://site.atouch.com.pt/en/support> for details.

Communication between iPhone, iPad, Apple Watch, HomePod, HomePod mini or Mac and Gateway5 for HomeKit is protected by HomeKit technology.