

DIN rail IP gateway

D-GATEWAYIP 3.0

Description

Bus powered IP gateway. It allows visualization and control through the mobile application of your home, locally or remotely.

Functionalities

- Translation of bus commands to an IP protocol.
- Encrypted communications;
- It allows the connection of up to 9 devices (phones, tablets, PCs, etc.);
- Ability to manage up to 250 devices;
- Mobile phone management via app;
- Simplified cell phone registration;
- Recording the model of the house for any mobile phone
- Indicator of changes

Application

Housing, Hotels, Offices, Factories.

Accessories

None.

Certifications

- EN 60669-2-1
- Low voltage directive 2014/35 / EU
- EMC directive 2014/30 / EU

Protections

This unit must be protected by a 6A circuit breaker. This circuit breaker can also protect the supply of other Atouch DIN rail modules protected by the same differential switch.

Notes

The D-GATEWAYIP supplies the bus with up to 30 units as long as the same differential. In case of two or more differentials, use D-Bussupply for the bus supply. Adds the 2020 app to the new functions such as:

- Backlight on / off - Dynamic device count
- Change synchronization Easily replicate the entire house to any mobile phone.



Assembly

DIN rail mounting.
5 space modules.

Connections

- Phase x 1 for 1.5 mm wire Ø
- Neutral x 1 for 1.5 mm wire Ø
- Bus x 1 for 1.5 mm wire Ø
- RJ45 10/100 Base T x 1

Electrical characteristics

Power:	230V 50Hz
Maximum consumption:	1.5W

Warranty


The warranty period is 5 years. Keep the invoice preserved for this purpose. Warranty is void if the product shows:

- changes to the labels surrounding the product;
- electrical damage caused by misuse;
- surface damage such as scratches, cuts and tears.

DIN rail IP gateway

D-GATEWAYIP 3.0

Dimensions

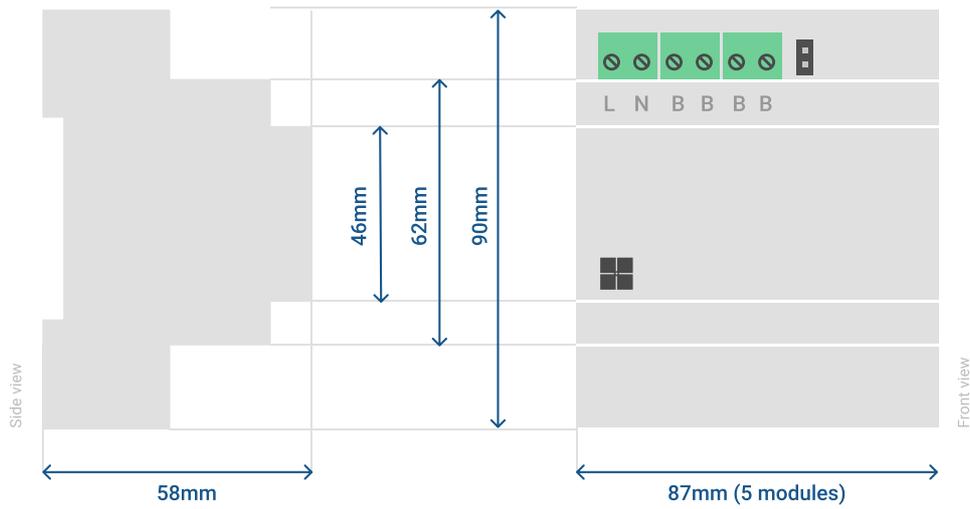

Wiring diagram

