

Keyboard support command

W-INPKEY

Description

Command for keyboard support in places where no switching is required. It is used to switch outputs from other commands.

Functionalities

- Keyboard support function only.

Application

Housing, Hotels, Offices, Factories.

Accessories

Touch panel:

- T-K4Gx-x
- T-OLEDx-x

Certifications


- EN 60669-2-1
- Low voltage directive 2014/35 / EU
- EMC directive 2014/30 / EU

Protections

The power of this unit is protected by the 10A circuit breaker that protects the lighting circuit in which it is inserted. This circuit breaker can protect several points of light and therefore several commands.

Notes

None.

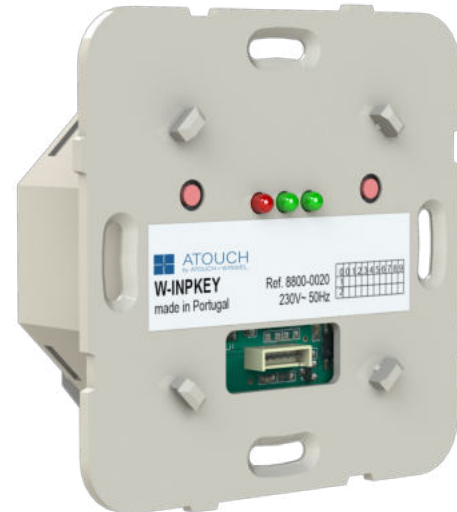

Assembly

Mounting in European equipment box:

- 73 mm diameter
- 60 mm deep

Connections

- Phase x 4 for single-wire 1.5 mm Ø
- Neutral x 4 for single-wire 1.5 mm Ø
- Bus x 2 for single-wire 1.5 mm Ø


Electrical characteristics

Food:	230V 50Hz
Consumption:	0.5W

Keyboard support command

W-INPKEY

Dimensions

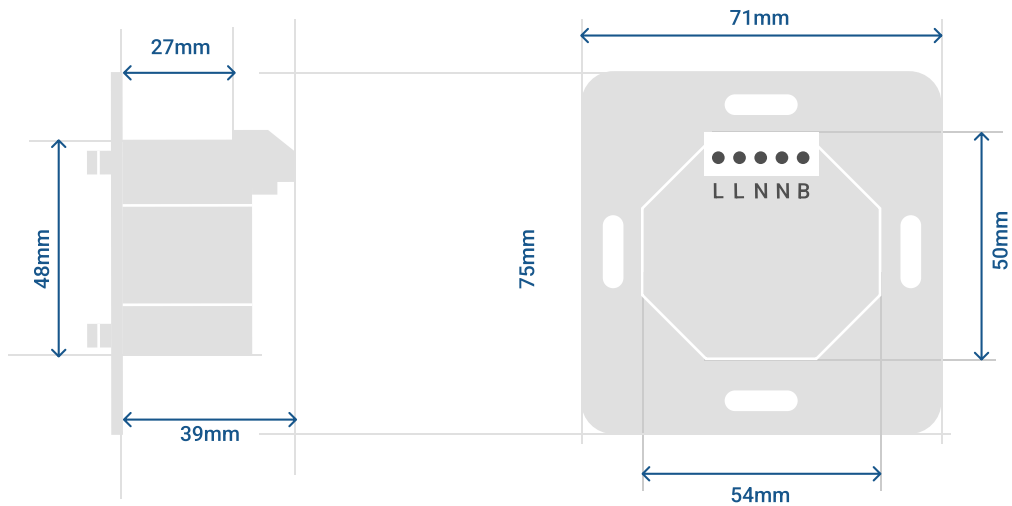

Wiring diagram

