



Glass touch panel for security

T-SECGx-x

Description

Tactile glass panel for the Security System.
It is equipped with OLED display and 10 touch keys.

References

Bright White:	T-SECGL-W
Bright black:	T-SECGL-B
Matte White:	T-SECGM-W
Matte black:	T-SECGM-B
White Matte with lines:	T-SECGM-WX
Matte Black w / lines:	T-SECGM-BX

Functionalities

- Quartz watch for autonomous operation with battery backup for about 1 hour without power.
- Automatic brightness decrease of the display after 1 minute.
- Disable / enable backlight.
- Scenarios "Leaving Home" and "Getting Home".
- Up / down control for blinds.

Application

Housing, Hotels, Offices, Factories.

Accessories

None.

Certifications

- EN 60669-2-1
- Low voltage directive 2014/35 / EU
- EMC directive 2014/30 / EU

Protections

This panel is automatically protected by the wall module (W-4SEC) to which it is connected.

Notes

None.



Installation

Mounting on the W-4SEC control.

Connections

Cable with fixed connector on the W-4SEC.

Electrical characteristics

Power Supply: From W-4SEC

Cleaning the touch panel

To clean your touch panels, use a damp cloth with diluted soap or detergent.


The use of glass cleaner, alcohol or thinner when in contact with the back weakens the glue and may lead to the replacement of the keyboard with the exclusion of warranty.



Glass touch panel for security

T-SECGx-x

Dimensions

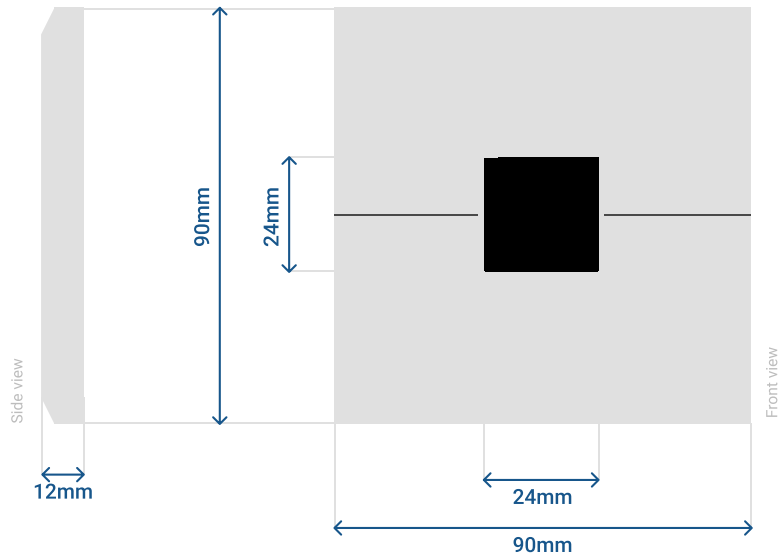

Wiring diagram

