

Description

9-function glass touch panel and OLED display for sound and air conditioning units (both exclusive). It works like the T-K4Gx-x touch panel, also allowing it to work in secondary mode for sound control and air conditioning.

References

Glossy White:	T-OLEDG-W
Glossy Black:	T-OLEDG-B
Matte White:	T-OLEDM-W
Matte Black:	T-OLEDM-B
Matte White with lines:	T-OLEDM-WX
Matte Black with lines:	T-OLEDM-BX

Functionalities

Main mode - Wall touch panel:

- 4 independent programmable keys;
- Multi-touch key for scenario
- Command selectable for each key;
- 4 slide keys for up / down or on / off.

Secondary mode - Sound / Air conditioning:

- Quartz clock for autonomous operation;
- 1 hour of backup for power failures;
- Automatic display diameter after 1 min without use;
- Function to program climate control.

Application

Housing, Hotels, Offices, Factories.

Accessories

None.

Protections

It comes from the wall control unit * to which it is mounted.

Notes

* for W-THERMO W-THERMO16 W-INPKEY W-1SHUTT W-20ONOFF W-2VLESS



Certifications

- EN 60669-2-1
- Low voltage directive 2014/35 / EU
- EMC directive 2014/30 / EU

Assembly

Mounting on :

- W-2ONOFF, W-INPKEY, W-1SHUTT e W-2VLESS.

Connections

Cable with fixed connector.


Electrical characteristics

Power Supply: From the wall controller

Touch panel for sound and air conditioning modules

T-OLEDx-x

Dimensions

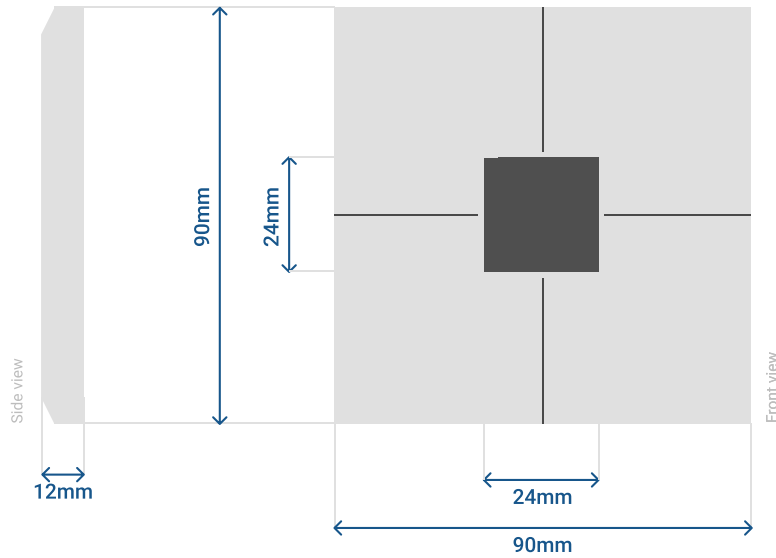

Wiring diagram

