



Glass touch panel with 9 functions

TW-K4Gx-x

Description

Glass touch panel with 4 touch sensors functions with indication of function and backlight.

References

Bright White:	TW-K4GL-W
Bright black:	TW-K4GL-B
Matte White:	TW-K4GM-W
Matte black:	TW-K4GM-B
White Matte with lines:	TW-K4GM-WX
Matte Black w / lines:	TW-K4GM-BX

Functionalities

- 4 independent programmable keys;
- Selectable command for each key;
- 4 slide keys for up / down or on / off;
- Multi-touch key for scenery;
- Disable / enable backlight.

Application

Housing, Hotels, Offices, Factories.

Accessories

None.

Certifications

- EN 60669-2-1
- Low voltage directive 2014/35 / EU
- EMC directive 2014/30 / EU

Protections

By D-BUSSUPPLY isolated circuit

Notes

None.



Assembly

Mounting in an empty "W" box

Connections

- 0.8 mm wire with fixed connector (0.24, Bus)
- 4 conductors 2 x 2 x 0,8 (Y(St)Y)
- Others

Electrical characteristics

Power Supply:	24VDC
24VDC	x 1 for 0,8mm wire
Ground	x 1 for 0,8mm wire
Bus	x 1 for 0,8mm wire

Cleaning the touch panel

To clean your touch panels, use a damp cloth with diluted soap or detergent.


The use of glass cleaner, alcohol or thinner when in contact with the back weakens the glue and may lead to the replacement of the keyboard with the exclusion of warranty.



Glass touch panel with 4 sensors

TW-K4Gx-x

Dimensions

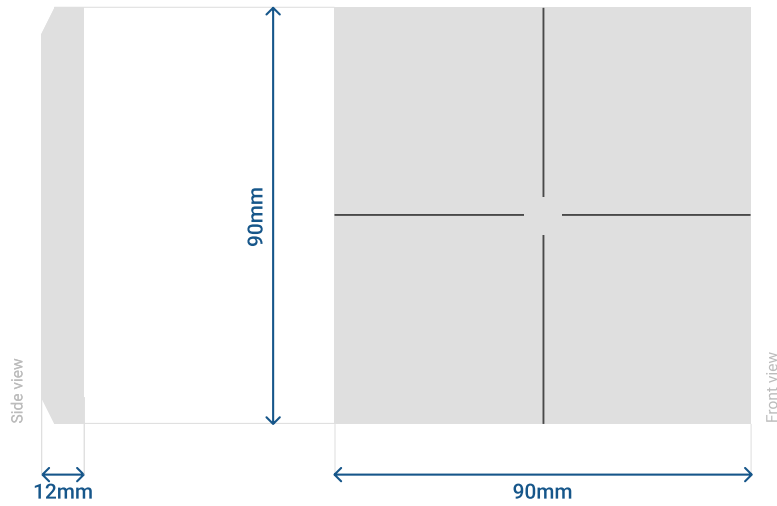

Wiring diagram

